


Two Lanes

Reflective License Plate

ANPR-ER220

HD1080P –High Speed LPC

- ◆ Super H-IR Integrated IR illuminator LPC camera.
- ◆ High Definition 1080P@30fps.
- ◆ Full day to identification 150KM plate number over 98%.
- ◆ Defog function (Hi/ Middle/ Low) to strongly take number.
- ◆ Video stream UDP/TCP/HTTP/Multicast.
- ◆ LED illuminator is separate optical lens and camera.
- ◆ Reverse pressure tunnel, avoid dust & water adhesion.
- ◆ Acceptable Light Level control and synchronize camera video.
- ◆ Dual spectrum filter for day/night ICR exchange.
- ◆ Synchronize auto/manual/external/CDS sensor/LED linking and ICR.
- ◆ Built in SD storage, supporting alarm trig and off line application.
- ◆ Long life MTBF >10,000 hours.
- ◆ Weather proof IP68 grade.

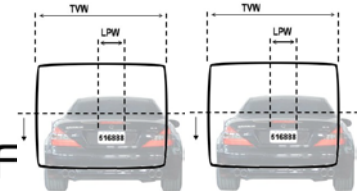

HD IP Camera CPT-MG532		CPT-MG532	
image sensor	1/3" SONY CCD	DI/DO	2-alarm input / 2-alarm output
processor	ARM9 32bit SoC	alarm out	TCP,HTTP,SMTP
storage	SPI 16M	alarm stream	SMTP,FTP
DDR II	DDR 2 1Gb	SH-IR LED CPT-X5IR	
duplex audio	G.711, 64 kbps, u-Law , A-Law	project distance	120 meter
sensitivity	0.01 Lux F1.2	recommend	15~30 meter
stream	1080P: 1920 x 1080 / 720P:1280x720 @30fps	IR spectre	850nm
2nd stream	640x360/320x180 @30fps	project angle	12~25 degree
s/n ratio	> 58dB (AGC off, AESC off, Y sig.)	LED type	SH-IR LED
compress mode	H.264 / M-JPEG (dual stream)	isolate sunshield	dual sunshield
LAN port	RJ45, 10/100M	CDS sensor	20lux +- 5
LED status	status *1 , status *2	CDS level	VR-trimmer
Bit Rate	128k-16M	GPIO output	NC / COM / NO
speed shutter	Independently adj. D/N 1/30-1/10,000 , Auto	illumination	150Lux/15M~50Lux/15M
white balance	2400°K ~ 12000°K	IR LENS	
BL SET	2 AREA , HBLC , BLC , OFF	Lens type	10~50mm Mega Lens
Day&Night	Color , B/W , EXT , AUTO	IR coating	clear picture and variorum picture
MFDN	IR-CUT	image format	1/1.8"
LENS	DC IRIS / MANUAL	mount mode	screw mount
picture	contrast/ level/ sharpness/ GAMMA	Mechanic and Performance	
mirror	hor. ver. reverse function	power source	90-260VAC
ROI	clip picture for save bandwidth	consumption	15W~32W adjustable
remote	RS232 , RS-485 (PELCO D)	clean glass	reverse pressure tunnel, avoid dust & water adhesion.
AGC	36 dB	hor. adjustment	optional-camera hor. position mechanic
WDR	wide dynamic range ON-OFF	casing structure	aluminum alloy
ID display	time-date and character	installation	clamshell open
LAN protocol	TCP,UDP,DHCP,RTP,RTSP,HTTP,NTP,UPnP, DDNS,PPPoE,SMTP,SNMP.Bonjour,FTP.	humidity	0 to 95% relative , non-condensing.
ONVIF	yes	connector	metal bundle
I-Motion	3 zone	heat sink	aluminum body
browser	IE, Firefox, Chrome, Safari.	weather grade	IP-68
media play	Quick Time , VLC	dimension	159(W) x 173(H) x 435(L) mm , 5 Kg
password	yes	temperature	operaton:-15°C ~ +60°C ,storage:-30°C ~ +70°C
filter	IP address select		

Specification is subject to change without prior notification.